



ISSN (Print) : 2320 – 3765
ISSN (Online): 2278 – 8875

International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Website: www.ijareeie.com

Vol. 7, Issue 6, June 2018

Mitigation of Harmonics by Using Active and Passive Harmonics Filters as well as faults Detect by Using MATLAB Simulation

Jhuma Das¹, Ashutosh Mishra²

M. Tech Scholar, Department of Electrical and Electronics Engineering, RSR Rungta College of Engineering & Technology, Bhilai (C.G.) India¹

Assistant Professor, Department of Electrical and Electronics Engineering, RSR Rungta College of Engineering & Technology, Bhilai (C.G.) India²

ABSTRACT: The engineer is faced with unfamiliar phenomena that require their unfamiliar tools to analyse, study and unfamiliar equipment to solve. This paper is basically concerned with the Analysis and Study of Harmonics generated and Destroyed by Power Electronic Converters. The investigation and analysis of harmonics has been carried out using Fast Fourier Transform (FFT) to evaluate the Total Harmonic Distortion (THD) of the converters with and without filters. MATLAB/SIMULINK have been employed for their presenting the simulation results because it is well established and recognized simulation software for the power system. Next, the designing of Passive Filter (Single tuned), is carried out after a literature review and have been applied to the converters for harmonics mitigation. In the future, we would proceed to work on Active as well as Passive (combination types) Filters for Harmonics Mitigation. The harmonic distortion solution chosen was to design a passive filter to decrease the distortion by shifting the resonance point of the network. This Paper includes the method to design the passive filter and its impact on efficiency and energy usage.

KEYWORDS: MATLAB software, FFT, Passive Filter, Active filter and Total Harmonics Distortion (THD),

I. INTRODUCTION

In electrical power system distribution traditional equipment such as rotating machine produces harmonics due to uneven distribution of flux in air gap of rotating machine this tends to no sinusoidal voltage & current generation in rotating machine such as synchronous machine. When we talk about their traditional equipment like transformer overloading of transformer is a causes of harmonic generation [1]. Harmonic are problem arises due to use their Non-linear load. In electrical power system harmonics is a seen for long time but major of problems related to harmonics are come in frame from past few years. In electrical power system distribution traditional equipment such as rotating machine produces harmonics due to uneven distribution of flux in air gap of rotating machine this tends to no sinusoidal voltage & current generation in rotating machine such as synchronous machine. When we talk about their traditional equipment like transformer overloading of transformer is a causes of harmonic generation. Harmonics in Electrical power system is defined as voltage and current which is defined as multiple integers of power system fundamental frequency. Now most of loads are producing are producing except of incandescent bulb light the magnitude of harmonic are varies from load to load [3]. Now in recent days Electrical power quality in electrical energy system has become a major challenge to engineers to maintaining the sinusoidal waveform in the device. If any distortion come in the waveforms is known as Harmonic Distortion in the system. In Harmonics are the sinusoidal waveform of currents and voltages having frequencies that there is an integer numbers of the frequency at which the supply power system is designed to operate. Harmonics are combined with their fundamental voltage and current can produce waveform distortion. In Harmonic (disturbance) distortion exists due to the non-linear characteristics of devices (system) and loads on the electric power



International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Website: www.ijareeie.com

Vol. 7, Issue 6, June 2018

system. Current distortion results as these voltages causes non-linear voltage drops across their system impedance (Z). When their industrial loads like as discharge lighting and electric arc furnaces can causes the harmonic distortion. Their effect of harmonics in the electrical power system includes the loss of data, overheating device or damage to sensitive equipment and more heating of capacitor banks. The Maximum frequency harmonics may also cause interference to nearby which telecommunication system [2].

All these above said problems and identified are severe for the electrical power system, so the harmonic mitigation is the important for both points of view of consumers and utilities end [4]. In Electrical Harmonic filtering technique by using passive filters and it is one of the most used and earliest technologies present in the system used to address the harmonics mitigation in system. The Passive filters has been used very widely uses because it is very simple and easier designing process and low cost factors. In their harmonics is sinusoidal waveform of currents or voltages having frequencies that are integer numbers of the frequency at which the supply power system is designed to operate. Harmonics are combined with their fundamental voltage and current can produce waveform distortion. In Harmonic (disturbance) distortion exists due to the non-linear characteristics of devices (system) and loads on the electric power system. Current distortion results as these voltages causes non-linear voltage drops across their system impedance. Industrial loads like electric arc furnaces and discharge lighting can cause harmonic distortion. The effect of harmonics in the power system includes the corruption and loss of data, overheating or damage to sensitive equipment and overheating of capacitor banks. The high frequency harmonics may also cause interference to nearby telecommunication system [5]. They supply Real and reactive power to the system while being highly effective in attenuating harmonic components. In Typically, Passive filter banks installed in medium-voltage systems are able to provide satisfactory to reduction in currents and voltages distortions after their planning and design the other solution is the application of active filters [5-7]. Harmonic current is isolated by using harmonic filters in order to protect the electrical equipment from getting damaged due to harmonic voltage distortion [6]. They are also be used to improving the electrical power factor. Harmonic distortion is a growing concern for many customers and for the overall power system due to increasing application of power electronics equipment. Harmonic distortion levels can be found throughout the complete harmonic spectrum, with the magnitudes of each individual harmonic component varying inversely with their position in the spectrum. Furthermore, the phase angle of each component is unique into itself. It is also common to use a single quantity, the total harmonic distortion (THD), as a measure of the magnitude of harmonic distortion. Passive filters exhibit the best relationship cost-benefit among all other mitigation techniques when dealing with low and medium voltage rectifier system [1-4].

II. SOURCES OF HARMONICS

The main sources of harmonics in electric power systems can be categorized as:

- a) Magnetization nonlinearities of transformer
- b) Rotating machines
- c) Arcing devices
- d) Semi-conductor based power supply
- e) Inverter fed A.C drives
- f) Thyristor controlled reactors
- g) Phase controllers
- h) A.C regulators

PASSIVE FILTER

The passive filter consists of elements like inductor, capacitor and resistor for their filtration purpose. Now this makes the passive filter configuration simple and easy to implement. The passive filter is connected with the electrical power distribution system and is series tuned and shunt tuned to present low impedance (Z) to particular harmonics so that these harmonics distortion are diverted from their normal flow path through the filter or is tuned to present high impedance to particular harmonics to stop them from affecting the circuit. The tuning depends on the configuration of the

International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Website: www.ijareeie.com

Vol. 7, Issue 6, June 2018

filter designed. The passive filter is a very good choice for constant loads and is a cost effective solution to harmonic reduction and power factor improvement. All these advantages can be lost if the input filter is not properly designed. An oversized input filter unnecessarily adds cost and volume to the design and compromises system performance Proposed Filter Connections This project explains how to design the optimal input filter for a two pulse diode rectifier application using optimization. For a two pulse diode rectifier circuit with low power rating, using a passive filter is best suited. In most of the cases a passive filter involves an RLC combination tuned (shunt and series) to serve the purpose. The proposed RLC filter approach to reduce line current and voltage harmonics generated by two diode rectifier. The simple passive-filter solution is the R-L-C passive filter equivalent circuit. The transfer functions of the filter:

III. MATLAB SIMULATION & RESULTS

These passive filters block the flow of harmonic current and voltage into ac/dc mains, by providing large impedance path at certain harmonic distortion frequencies for which the filter is tuned. Moreover, the harmonic compensation is practically independent of the source impedance. But, passive filter like shunt and series filter suffer due to the reduction in dc link voltage and current due to the voltage drop across the passive filter components at both fundamental as well as fundamental harmonic frequencies. These passive filters block the flow of harmonic current and voltage into ac/dc mains, by providing large impedance path at certain harmonic distortion frequencies for which the filter is tuned. Moreover, the harmonic compensation is practically independent of the source impedance. But, passive filter like shunt and series filter suffer due to the reduction in dc link voltage and current due to the voltage drop across the passive filter components at both fundamental as well as fundamental harmonic frequencies

The passive filters are used to mitigate power quality problems in ac-dc converter with R-C load. Moreover, apart from mitigating the current harmonics, the passive filters also provide reactive power compensation, thereby, further improving the system performance. Voltage and current source type of harmonic producing loads, generally, passive shunt filters and passive series filters are recommended. These filter apart from mitigating the current harmonics, also provide limited reactive power compensation and dc bus voltage regulation. The performance of these Passive filters depends heavily depends on the source impedance present in the system or device, as these filter act as sinks for the harmonic currents. On the other hand, for voltage source type harmonic producing loads, the use of the series passive filters is recommended.

IV. HARMONIC FILTERING TECHNIQUES

Active Filtering Technique: The more sophisticated active filtering concepts operate in a wide frequency range, adjusting their operation to the resultant harmonic spectrum. In this way, they are designed to inject harmonic currents to counterbalance existing harmonic components as they show up in the distribution system [3].

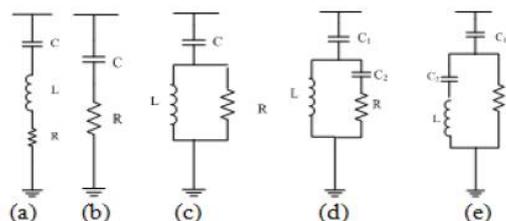


Fig. 1. Single-tuned (b) 1st order high-pass (c) 2nd order high-pass (d) 3rd order high-pass (e) C-type. [3]

International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Website: www.ijareeie.com

Vol. 7, Issue 6, June 2018

Case 1-Model Running without Harmonic Filters: In the Simulink model, the HVDC rectifier is built up from two 6-pulse thyristor bridges connected in series. The converter is also to connect to the electrical power system with an 11kVA three-phase transformer (three windings). A 50kVAR resistive load is connected to the DC side through a 0.5H smoothing reactor as shown in Fig 2.

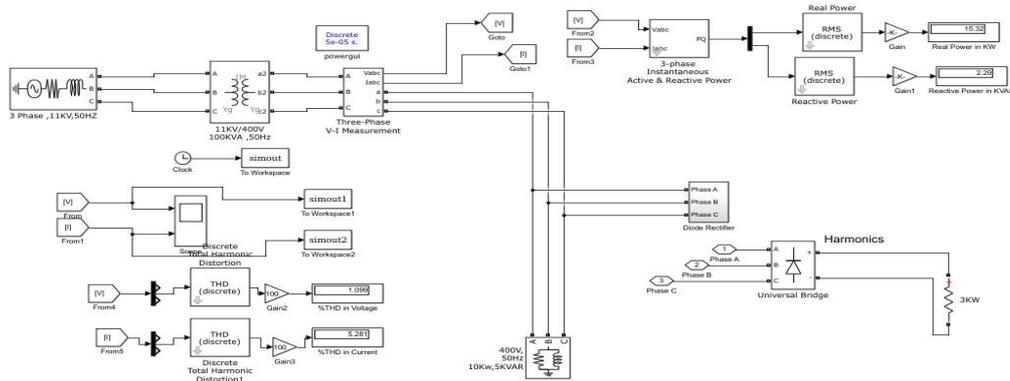


Fig. 2 MATLAB based model without Passive Filters.

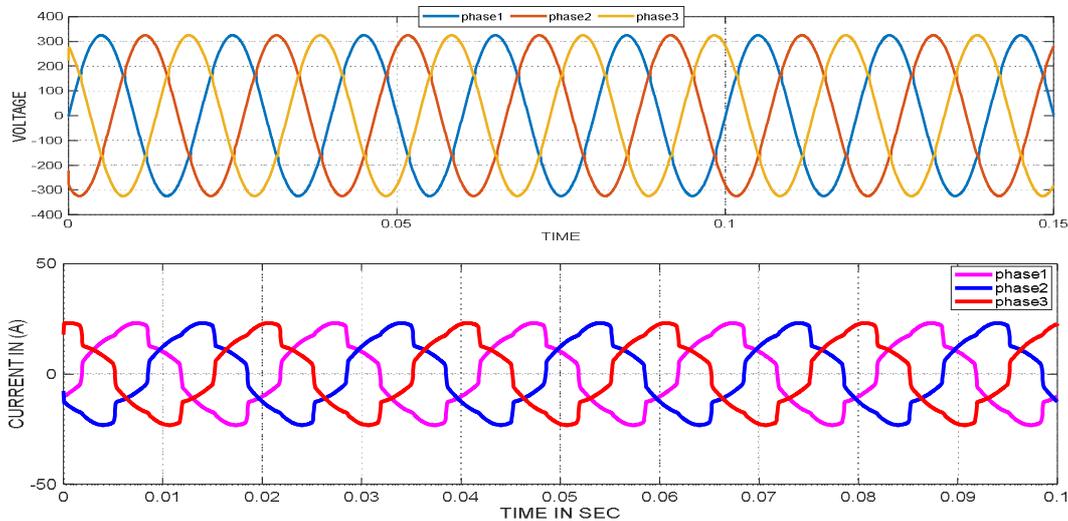


Fig. 3 Voltage and Current Waveform without Filters.

Case 2-Model Running with Double Tuned Harmonic Filters MATLAB based model with three-phase Double tunedpassive Filters. When the model is running with load on condition with harmonic filters installation, the status of voltage and current waveforms and Fig. 4. As shown in Fig.5 voltage and current waveforms change to smooth by the effect of Double tunedharmonic filters installation.

International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Website: www.ijareeie.com

Vol. 7, Issue 6, June 2018

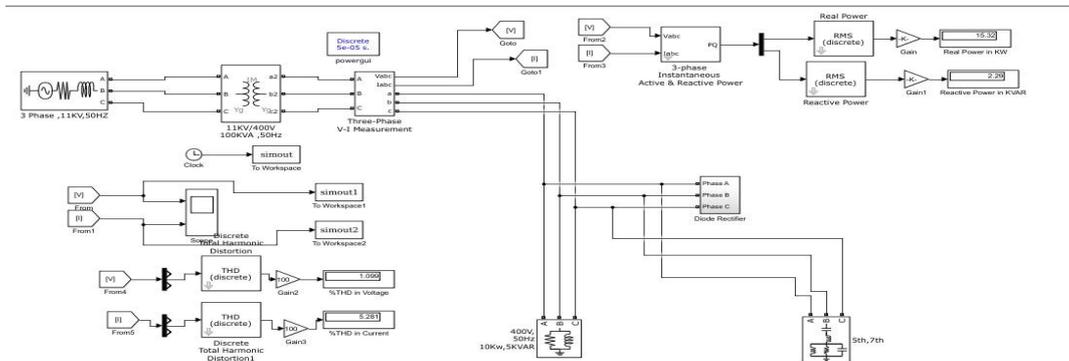


Fig. 4 MATLAB based model with three-phase Double tuned passive Filters.

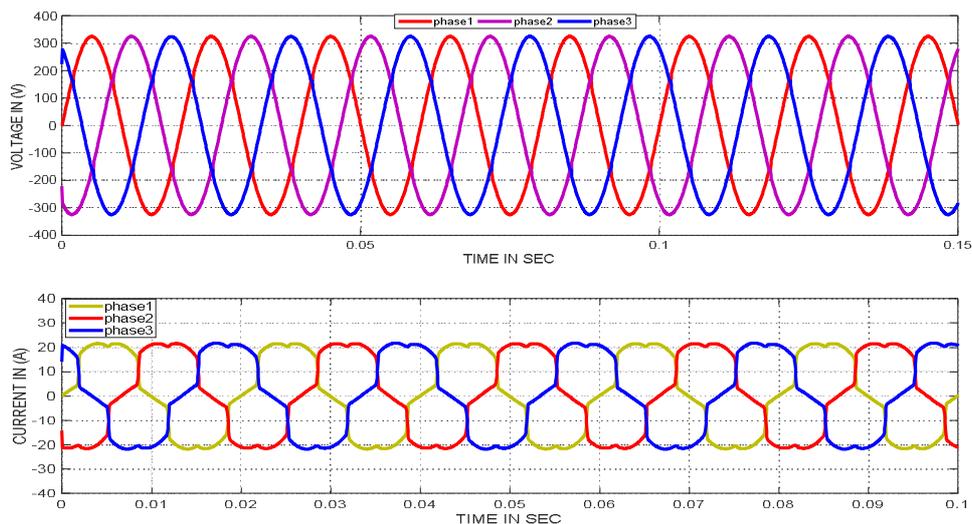


Fig. 5 Voltage and Current Waveform with Double Tuned Harmonic Filters.

Case 3-Model Running with Single tuned Harmonic Filters: MATLAB based model with three-phase Single tuned passive Filters. When the model is running with load on condition with harmonic filters installation, the status of voltage and current waveforms. As shown in Fig.6 voltage and current waveforms change to smooth by the effect of Single tuned harmonic filters installation.

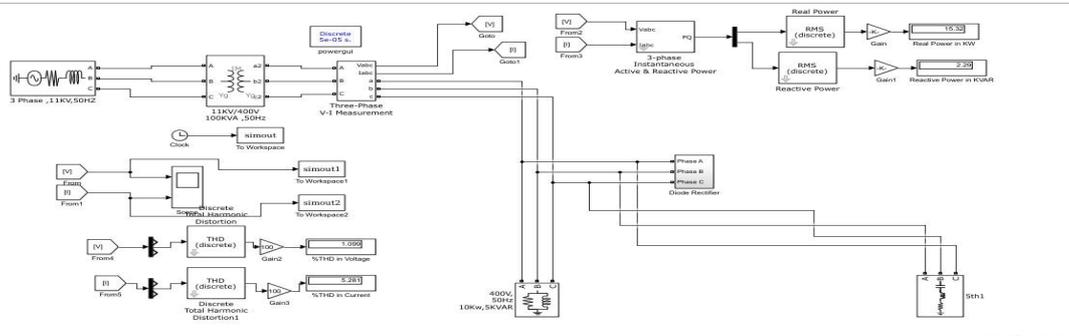


Fig. 6 MATLAB based model with three-phase Single tuned passive Filters.

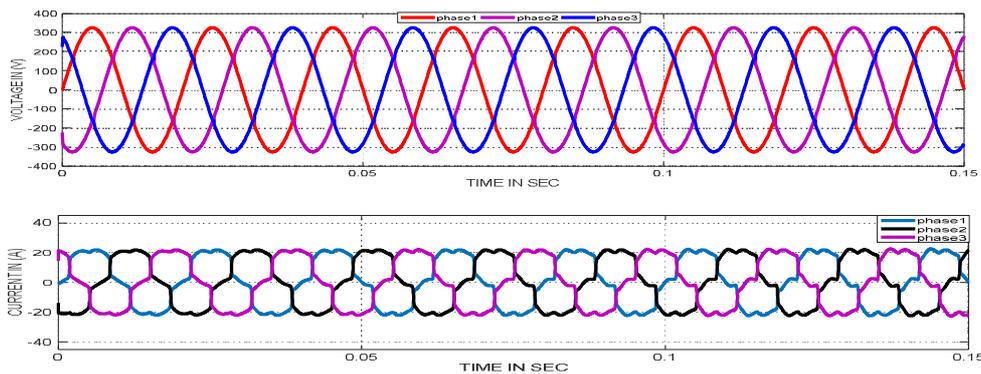


Fig. 7 Voltage and Current Waveform with Single Tuned Harmonic Filters.

Case 4- Model Running with C-types high pass filter Harmonic Filters: MATLAB based model with three-phase passive Filters. When the model is running with load on condition with harmonic filters installation, the status of voltage and current waveforms and Fig. 8 As shown in Fig. 9 voltage and current waveforms change to smooth by the effect of C-types high pass filter harmonic filters installation.

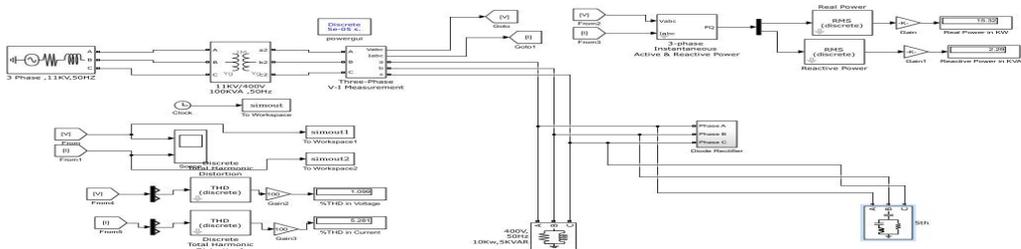


Fig. 8 MATLAB based model with three-phase C-types high pass filter passive Filters.

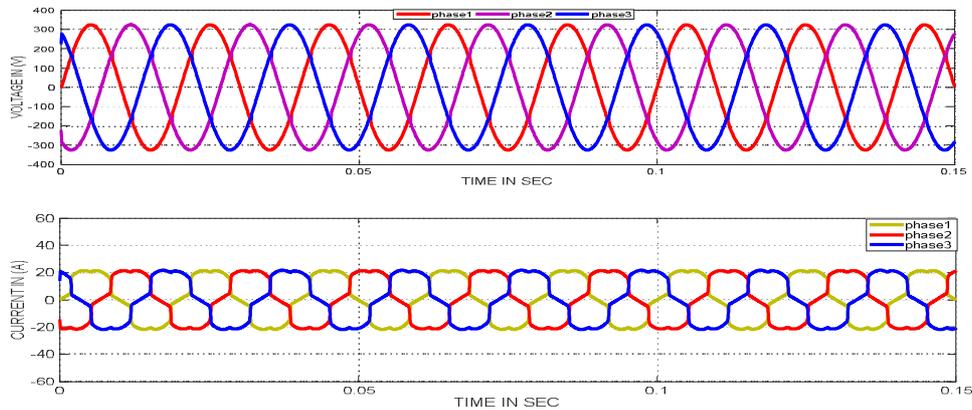


Fig. 9 Voltage and Current Waveform with C-types high pass filter Harmonic Filters.

Case 5- Model Running with C-types high pass + Double tuned passive Harmonic Filters: MATLAB based model with three-phase C-types high pass + Double tuned passive Filters. When the model is running with load on condition with harmonic filters installation, the status of voltage and current waveforms and Fig 10. As shown in Fig.11 voltage and current waveforms change to smooth by the effect of C-types high pass + Double tuned passive harmonic filters installation.

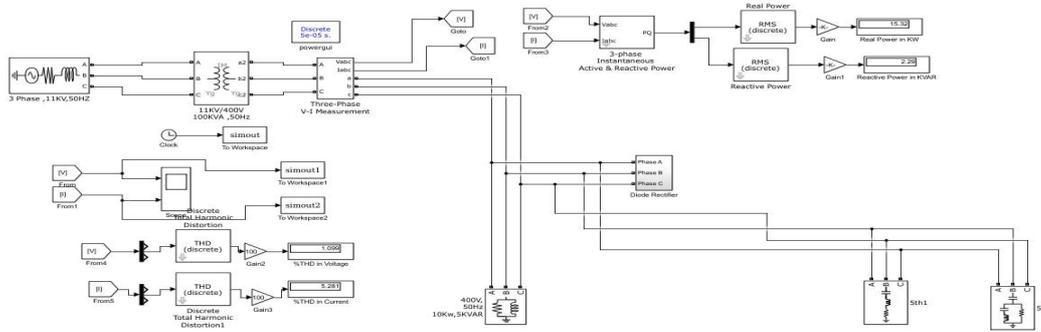
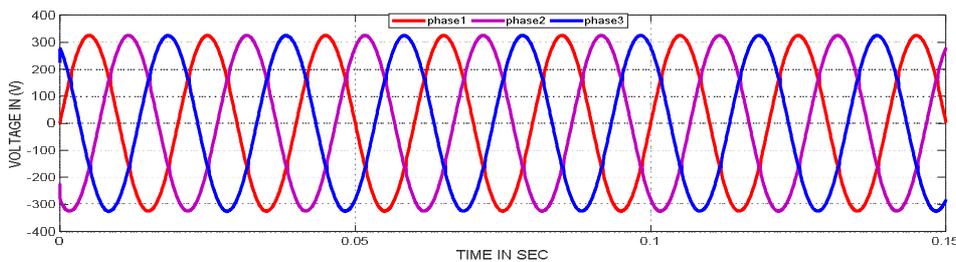


Fig. 10 MATLAB based model with three-phase C-types high pass + Double tuned passive Filters.



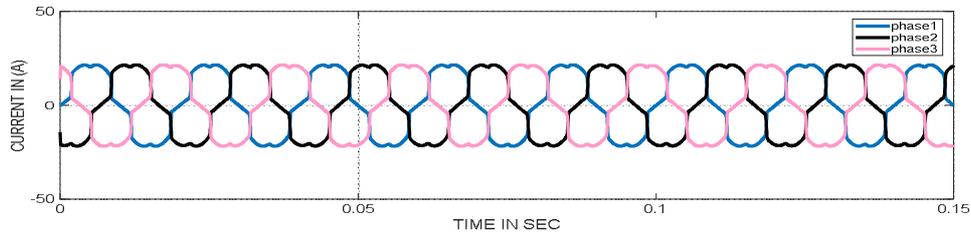


Fig. 11 Voltage and Current Waveform with C-types high pass + Double tuned passive Harmonic Filters.

Case-6 Modelling and simulation of Mitigation of 3kw Harmonics with Active Filters

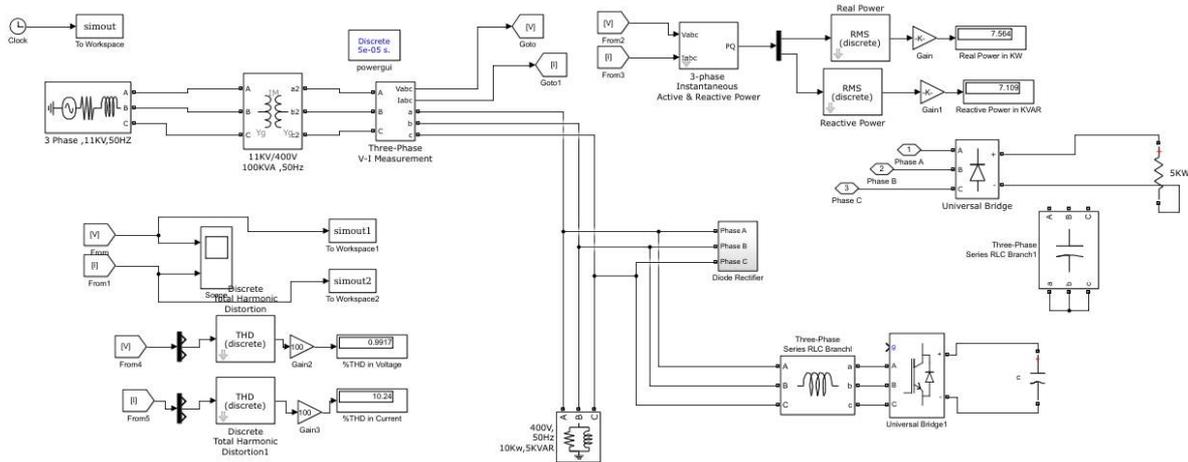


Fig. 12 MATLAB based model with Active Power Filters.

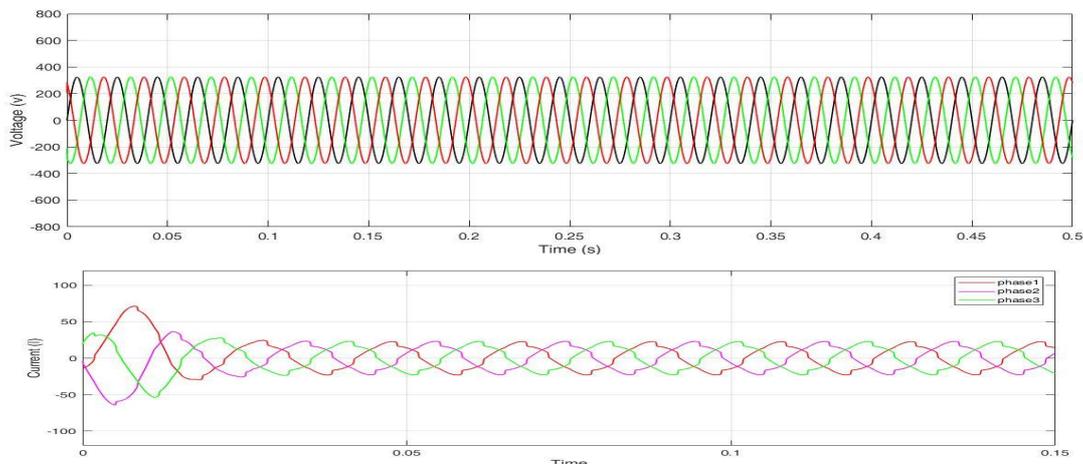


Fig. 13 Voltage and Current Waveform with Active Harmonic Filters.



International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Website: www.ijareeie.com

Vol. 7, Issue 6, June 2018

V. PASSIVE FILTER DESIGN WITH HARMONIC BEHAVIOUR

In harmonic compensation is practically independent of the source impedance. But, passive filter suffer due to the less in dc link voltage due from the voltage drop across the filter components at both fundamental as well as harmonic frequencies In this project we studies and discuss electricity or electrical power are increases day by day and transmits more electrical power by rapidly increasing the transmission line capacity from one station to another station.

I) Table: 1 Total Harmonics Distortion with filters and without filter harmonics value.

S. No.	Passive Filters	Harmonics W/o Filter	Time In Sec	%THD (V)	%THD (I)	%THD (P-real)	%THD (P-Reac)
1	Not Used	3kw Harmonics present	0.25 sec	1.353	16.44	9.402	2.698
2	Double tuned	3kw Harmonics present	0.15 sec	1.282	11.87	12.37	2.182
3	Single tuned	3kw Harmonics present	0.15 sec	1.293	12.7	12.36	2.299
4	C-Types high pass filter	3kw Harmonics present	0.15 sec	1.3	12.66	12.37	2.308
5	Single tuned+ C-Types high pass filter	3kw Harmonics present	0.15 sec	1.168	12.56	12.36	2.33

II) Table: 1 Total Harmonics Distortion with filters and without filter harmonics value.

S. No.	Passive Filters	Harmonics W/o Filter	Time In Sec	%THD (V)	%THD (I)	%THD (P-real)	%THD (P-Reac)
1	Not Used	5kw Harmonics Present	0.25 sec	1.861	18.28	14.00	3.527
2	Double tuned	5kw Harmonics Present	0.15 sec	1.819	17.72	13.98	3.197
3	Single tuned	5kw Harmonics Present	0.15 sec	1.852	18.38	13.97	3.324
4	C-Types high pass filter	5kw Harmonics Present	0.15 sec	1.852	18.38	13.98	3.324
5	Single tuned+ C-Types high pass filter	5kw Harmonics Present	0.15 sec	1.671	15.99	13.41	4.993

VI. CONCLUSIONS

Passive power filters are the emerging devices, which can perform the job of harmonic elimination properly. First their harmonic disturbances are detected from the electrical power line using transducers, and then harmonic waveform is separated from the fundamental sine wave using reference signal estimation techniques. The Pulse Width Modulation



ISSN (Print) : 2320 – 3765
ISSN (Online): 2278 – 8875

International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Website: www.ijareeie.com

Vol. 7, Issue 6, June 2018

signals for their controlling purpose are then generated using any one of control signal generation schemes. Thus a passive shut filter and passive series filter will provide harmonic elimination with better controlling methods.

REFERENCES

- [1] D.Maheswaran, N. Rajasekar, L. Ashok kumar, "Design of passive filters for reducing harmonic distortion and correcting power factor in two pulse rectifier systems using optimization" Journal of Theoretical and Applied Information Technology 30th April 2014. Vol. 62 No. 2
- [2] Gonzalez, D. A "Harmonics Mitigation of Industrial Power System Using Passive Filters" Mehran University Research Journal of Engineering & Technology, Volume 31, No. 2
- [3] Thet Mon Aye and Soe Win Naing, "Analysis of Harmonic Reduction by using Passive Harmonic Filters" IJSETR ISSN 2319-8885 Vol.03, Issue.45 December-2014, Pages: 9142-9147.
- [4] Hamid Rahimi Esfahani, Rasoul Amirfattahi, Farshad Kiyoumars, and Ebrahim Borzabadi, "Designing Passive Filters for Harmonic Reduction in a Noisy System Based on Discrete Wavelet Transform" International Journal of Computer Theory and Engineering, Vol. 4, No. 5, October 2012
- [5] Zubair Ahmed Memon, "Design of Three-Phase Hybrid Active Power Filter for Compensating the Harmonic Currents of Three-Phase System" Mehran University Research Journal of Engineering & Technology, Volume 31, No. 2
- [6] Surajit Chattopadhyay, Madhuchhanda Mitra, Samarjit Sengupta, "Electric Power Quality"
- [7] Bollen, M.H.J.: Understanding Power Quality Problems-Voltage Sags and Interruptions. IEEE Press, NewYork (2001)
- [8] N. Mohan, T.M. Undeland, W.P. Robbins, Power Electronics-Converters, Applications, and Design, John Wiley & Sons, Inc., New York 1989.
- [9] Taylor, J.T. and Huang, Q.: Handbook of Electrical Filters, Boca Raton, Fla, (1997).
- [10] Yacamini, R.: Power System Harmonics, (1996) 185– 93.
- [11] Bose, B.K.: Modern Power Electronics Evolution, Technology and Applications, (1992).
- [12] Akagi, "Control Strategy and site selection of a shunt active filter for damping of harmonics propagation in power distribution systems", IEEE Trans. on Power Delivery, Vol. 12, Jan. 1997, pp.354-363.
- [13] Lecture notes: harmonic analysis Russell Brown, Department of mathematics University of Kentucky Lexington, KY 40506-0027 12 June 2001
- [14] Harmonics, Sources, Effects and Mitigation Techniques Ali I. Maswood and M.H. Haque School of EEE, Nanyang Technological University Second International Conference on Electrical and Computer Engineering ICECE 2002, 26-28 December 2002, Dhaka
- [15] Bhattacharya et al, "Hybrid Solutions for improving Passive Filter Performance in high power Applications", IEEE, Trans. on Industry Applications, Vol. 33, No. 3, May/June 1997, pp. 732-747.
- [16] Update of Harmonic Standard IEEE-519, "IEEE Recommended Practices and Requirements for Harmonic Control in Power Systems", October 1991.
- [17] Swamy M.M.: Passive Harmonic Filter Systems for Variable Frequency Drives, U.S.Patent no: 5,444,609, August, (1995).