



Android Based Women Safety Using GPS and GSM

M.Suganya¹, M.Vasanthi², K.Velmurugan³, K.Umasankar⁴, V.Souravsibi⁵, E.Sathish Kumar⁶

Assistant Professor, Department of ECE, Gnanamani College of Technology, Namkkal, Tamilnadu, India^{1,2,6}

Final year B.E Students, Department of ECE, Gnanamani college of Technology, Namkkal, Tamilnadu, India^{3,4,5}

ABSTRACT: In recent times, role of women in all industries have increased. Simultaneously, crime against women is also increasing day by day and this is the high time to provide safety for all working women. This paper focuses on women tracking system for all working women. There is no powerful existing system to prevent the crime rates against women. This system gives information about a woman or a victim who has low assurance about their safety to their respective family and the place where they work, which have to be more concerned about their women workers. This system includes the victim module and two receiver modules for getting information about the missed women. This arrangement includes Microcontroller Global Positioning System(GPS) and the Global Arrangement for Mobile communication (GSM) and the receiver module that includes a Android mobile mechanism of the victim's relations and a monitoring data base in the manipulation room of an the corresponding association or workplace. A single click on this app identifies the location of place through GPS and sends a message comprising this location. Continuous location tracking information via SMS helps to find the location of the victim quickly and can be rescued safely. The heinous incident that outraged the entire nation have waken us to go for the safety issues and so a host of new apps have been developed to provide security systems to women. **KEYWORD:**GPS(global positioning system), Microcontroller PIC16F877A, GSM (global system for mobile communication)

I.INTRODUCTION

There is a rising needs for pursuing mechanisms, that can be a existence saving devices. Across eras of low assurance, people can use these arrangements to retain trail of victims. Pursuing provides countless services such as discovering their of locale, retain trail of employers to monitor whereas they are at all periods across of the workday , the teenagers to manipulation their movements, tinier children, pets and elders after they go missing and for countless supplementary purposes. The progress to location dependent service and requests in the wireless arrangements endures to need the progress of extra precise and reliable and positioning and pursuing systems. This paper goes across an effectual pursuing arrangement lacking periodic intervals .Women are accomplished at mobilizing diverse groups for frequent causes. We are aware of importance of women's security, but we must recognize that they should be well secured. A woman is not much powerful when compared to a men physically, in a crisis situation and needs a helping hand to relieve them. The best way to minimize chances in becoming a victim of violent crime (robbery, sexual assault, rape, domestic violence) is to identify and call on resources to help you out of unsafe situations. Whether you are in instant trouble or got separated from friends during night and do not know how to get home, having these apps on your phone can diminish your risk and bring assistance when you require it. Recently , In New Delhi an incident happened, which shocks our nation and woke us to Know about our safety of women .This new app is Developed to provide security system on their mobile phones. Here, we introduce an android app that ensures the safety of women.

II. RELATED WORKS

A. GLOBAL POSITIONING SYSTEM(GPS)

GPS exploration arrangement is extensively adopted for pursuing nowadays. It is chiefly utilized to assist the caretakers to trail the locale of the victim's alongside turn-by-turn instructions. It can be uses additionally be utilized in pursuing a person and how long the she stayed at every single location. These purposes permit users to monitor the victim's locale and intimate the caretaker's in case of emergency.

B. GLOBAL SYSTEM FOR MOBILE COMMUNICATION

GPS is a real-time satellite discovery arrangement for three dimensional locale determinations. It was industrialized by the countless U.S manipulation GPS module has three main components; they are satellite collection, ground-control or



monitoring web, and a user accessible device (i.e.) an android mobile. The satellite Collection is the group of satellites in path that accomplish the fluctuating signals and data messages to the user equipment. The Global Arrangement for Mobile Contact (GSM) is the second-generation digital cellular mobile network. It is extensively used concerning the world. Even though improvements to GSM such as the subsequent creation arrangements have been rolled out to cater for faster data centric traffic, retrograde compatibility to GSM is yet maintained. Due to its expansive potential, it is selected as the medium for transfer of locale information. The easy and inexpensive Short Memo Service (SMS) permits users to dispatch up to 160 characters. This SMS is being consented by the android request and it helps in pursuing the locale by the link endowed in the message. The main constituents of the vehicle pursuing arrangement are the GPS module that is utilized to attain the victim's coordinate and the GSM modem that is utilized to send the locale to the user's phone across the mobile network.

C. MICROCONTROLLER

A microcontroller is a tiny computer (SOC) on a solitary consolidated route encompassing a processor core, recollection, and programmable input/output peripherals. Plan recollection in the form of Ferroelectric RAM, NOR flash or OTP ROM is additionally frequently encompassed on chip, as well as a normally tiny number of RAM.

D. ANDROID DEVICE

The android arrangement is a kind of free and open basis program working arrangement established on Linux, it encompassing of working arrangement, middleware, and key requests. The level of the Android arrangement can be plainly delineated as: the underlying is Linux, the middle is a Java adjacent contraption shouted dalvik, and the above is the Android runtime library. The Android demands are Java strategies running in the eclipse. In finish, Android demands encompass of four constituents, as are the Activity, Service, Broadcast receiver and Content provider. The Attention is constituent accountable for Android demands link alongside users, bestowing discernible user interface for the application; Service owns the comparable locale as the Activity, but it has no discernible interface, no link alongside the user, running in the background. Broadcast Receiver is accountable for monitoring the display news of Android supplementary components; Content Provider provides a data deals average for Android across application. Because the Android arrangement is instituted on Linux kernel and has the characteristics of open basis and free, it quickly come to be the large crowd of fans and the prop of countless vendors.

III. PROPOSED WORK

The progress of the working women pursuing arrangement will be described in detail in this section.

The block diagram of this pursuing arrangement is as shown in Fig. 1. The three main components of the arrangements are the GPS Receiver module, GSM module and microcontroller. The receiver module's main purpose is to attain the victim's coordinates. These coordinates are periodically (user selectable) dispatched to microcontroller. The microprocessor procedures this information and will next dispatch the locale data to the GSM to be sent across the mobile network to the user after demanded on a non- periodic basis[5].

BLOCK DIAGRAM.

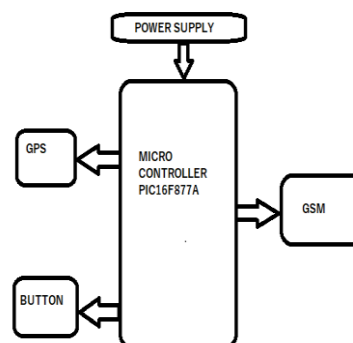


Figure 1: Block diagram for the components of tracking system

The microcontroller transmits/triggers the message through the Universal Asynchronous Receiver/ Transmitter (UART) interface [5]. The progress of the in working women pursuing arrangement will be delineated in detail in this section. The three main components of the women tracking system are the GPS (receiver module), GSM module and



PIC16F877A microcontroller. The Ultimate aim of GPS module is to locate the victim's coordinates. These coordinates are periodically (user selectable) dispatched to microcontroller. The microprocessor processes this data and will subsequently dispatch the locale data to the GSM to be dispatched across the mobile web to the user afterward commanded on a non-periodic basis. The modules and microcontroller communicate across the Universal Asynchronous Receiver/Transmitter (UART) interface [2].

ARCHITECTURE

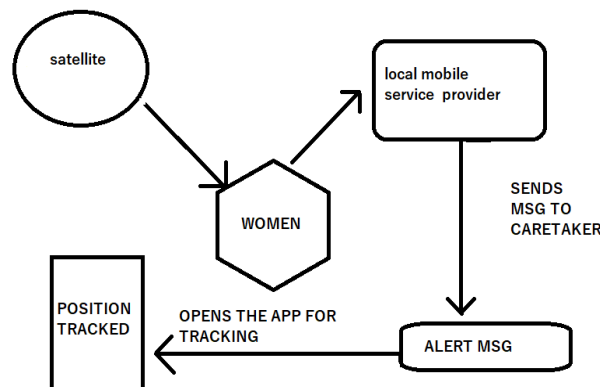


Figure 2: System Architecture of Women tracking system

A.MICROCONTROLLER

Early models of PIC had read-only recollection (ROM) or field-programmable EPROM for plan storage, a little alongside ability for removing memory. All present models use Flash recollection for plan storage, and newer models permit the PIC to reprogram itself. Plan recollection and data recollection are separated. Data recollection is 8-bit, 16-bit and in latest models, 32-bit wide. Plan orders vary in bit-count by relations of PIC, and could be 12, 14, 16, or 24 bits long. The education set additionally varies by ideal, alongside influential chips adding orders for digital gesture processing functions. The hardware skills of PIC Mechanisms scope from 8-pin DIP chips up to 100-pin SMD chips, alongside discrete I/O pins, ADC and DAC modules, and contact seaports. The producer supplies computer multimedia for progress. Third party and a little open source instruments are additionally available. A little portions have in-circuit software design capability; low-cost progress programmers are obtainable as well as high-production programmers. The following Pin diagram Figure 3 explains the features of PIC16F877A Microcontroller in which the GSM module and GPS devices are connected across UART pin. The UART pins of microcontroller are the Transmitter (Tx) and Receiver (Rx) pins which are at 25 and 26 locations. PIC mechanisms are accepted alongside both manufacturing developers and hobbyists due to their low price, expansive potential, colossal user centre, comprehensive collection of request notes, and potential of low price or free progress instruments. The UART pins (i.e.) the transmitter (Tx) and receiver (Rx) pins are connected to the GSM and GPS module. The receiver pin RC7 is connected to the transmitter of the GPS module. The transmitter pin RC6 is connected to the receiver of the GSM module.

B.GPS

The Globe Positioning Arrangement (GPS) is a discovery and precise positioning instrument Industrialized by the Department of defense, Tear into six clusters of four, every single solitary cluster is allocated a disparate orbital trail to make sure that they can be noticed from anywhere on the Earth's surface [1]. The GPS arrangement is utilized to trail the stable vehicle.

C.EMERGENCY SWITCH

The emergency button is portion of the vehicle unit. Emergency button is extremely vital ability endowed to operatives at emergency conditions. The emergency button is related to the digital pin of the



microcontroller device. Emergency button is attached at a locale that it ought to be facily obtainable to employees in an emergency situation. Operative can admission it easily. On pressing an emergency button an alert memo and the data regarding the precise locale span of the victim is dispatch to the caretaker's mobile via application.

D.GSM

GSM stands for Globe Arrangement for Mobile communication. It is digital mobile telephony system. The GSM technology sends the triggered memo from the ID-CARD of the victim to the caretakers mobile as a notification.

E.ANDROID APPLICATION

The android mechanism is utilized to enhance the reliability of the system. The android mechanism is allocated as an application in caretaker's mobile. In reply to the deed of pressing an emergency button by the operative the android mechanism receives the message as offline notification and locates the exact location of the victim.

IV. RESULTS AND DISSCUSSIONS

This android request is industrialized in eclipse instrument below java platform. The pursuing are given aftermath of the eclipse emulator in Figure 4 displays the tracer request that has been developed.

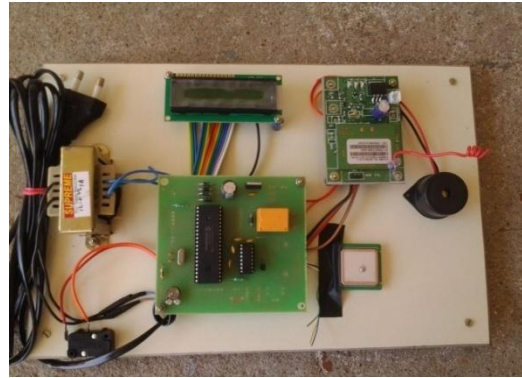


Fig 4.Output

When the victim presses the switch or the emergency button in the ID-CARD the memo gets activated continuously from the microcontroller and reaches the caretakers mobile. The screenshot of the consented alert memos are display below in Figure 4, that consists of latitude & longitude benefits and a link that links the person's locale alongside Google map via application. When the caretaker of the particular victim receives the memos from the corresponding ID-CARD, it automatically opens the request and displays the locale of the victim. The following screenshot shows the alert message received from the GPS of the IDCARD in the caretakers mobile.

With the constant progress of intelligent mobile phone hardware and multimedia technologies, it becomes more and extra facily for mobile phones and supplementary mobile terminals accessing to the web and becoming information. This paper proposes a monitoring arrangement established on Android mobile terminals, alongside SMS as the medium. Our proposed work has been developed as a project but it could be enhanced further using nanotechnology concepts.

REFERENCES

- [1] PoonamBhilare¹,AkshayMohite²,Dhanashri Kamble³, SwapnilMakode⁴ and RasikaKahane⁵ "WOMEN EMPLOYEE SECURITY SYSTEM USING GPS AND GSM BASED VEHICLE TRACKING" in international journal for research in emerging science and technology, volume-2, issue-1, january-2015
- [2] H.A. AbdallahDafallah¹ "DESIGN AND IMPLEMENTATION OF AN ACCURATE REAL TIME GPS TRACKING SYSTEM" in e-Technologies and Networks for Development (ICEND), 2014 Third International Conference



- [3] P. A. Shinde ; ; Y. B. Mane ; P. H. Tarange “REAL TIME VEHICLE MONITORING AND TRACKING SYSTEM BASED ON EMBEDDED LINUX BOARD AND ANDROID APPLICATION” in Circuit, Power and Computing Technologies (ICCPCT), 2015 International Conference
- [4] W. Yong; F. D. Lei “DESIGN AND IMPLEMENTATION OF REAL-TIME IMAGE MONITORING SYSTEM BASED ON ANDROID MOBILE TERMINAL” Information Technology and Artificial Intelligence Conference (ITAIC), 2014 IEEE 7th Joint International
- [5] Hoang Dat Pham; M. Drieberg ; Chi Cuong Nguyen “DEVELOPMENT OF VEHICLE TRACKING SYSTEM USING GPS AND GSM MODEM” in Open Systems (ICOS), 2013 IEEE Conference .
- [6] Z. Zhang; W.Luo; X. Li ; B. Yan “THE DESIGN AND IMPLEMENTATION OF REMOTE REAL TIME MONITOR SYSTEM FOR EMBEDDED DEVICES BASED ON GPRS” in Computer Science and Electronics Engineering (ICCSEE), 2012 International Conference.
- [7] Peng Wang ; Z. Zhao ; Chongbin Xu ; Zushun Wu “DESIGN AND IMPLEMENTATION OF THE LOW-POWER TRACKING SYSTEM BASED ON GPSGPRS MODULE” in industrial Electronics
- [8] D. Belton Canada ; T. Haddrell ; C. de la Fuente “INTEGRATED ASSISTED GPS SOLUTIONS FOR SECURITY APPLICATIONS” in Telemetry and Telematics, 2005. The IEE Seminar on (Ref1 No. 2005/11009)
- [9] A. Okatan ; A. Salih ; C. Akpolat ; K. Celik “MICRO-CONTROLLER BASED VEHICLE TRACING SYSTEM VIA USE OF GPS AND GSM” in Recent Advances in Space Technologies, 2003 RAST '03. International Conference.
- [10] Jianchao Luo, Lei Luo, Yonghong Wu in the article “PORTING MOBILE WEB APPLICATION ENGINE TO THE ANDROID PLATFORM” (2010).
- [11] A Car Test for the Estimation of GPS/INS Alignment Errors Sinpyo Hong, Man Hyung Lee, Senior Member, IEEE, Sun Hong Kwon, and Ho Hwan Chun IEEE TRANSACTIONS ON INTELLIGENT TRANSPORT SYSTEM.
- [12] Velocity based Tracking and Localization System using Smartphone's with GPS and GPRS/3G Ibrahim Mohammed Bouhorma Department of Computer Engineering, Laboratory of the Computer System and Telecommunication "LCST" FST, Abdelmalek Essaadi University, Tanger, Morocco. [13] “GPS AND GSM BASED VEHICLE TRACING AND EMPLOYEE SECURITY SYSTEM” - S.S. Pethakar N. Srivastava S.D.Suryawanshi et al.